

ETL-Certified, NEMA type 3R rainproof enclosure. One piece construction from G90 galvanized steel.

All surfaces have electrostatic gray powder coated finish.

120/240 volt single phase, 125 Amp.

Suitable for Mobile Home service equipment / Temporary Site service equipment.

Loop feed lugs on all pedestals up to 350 MCM wire.

Tin plated copper stabs standard.


Factory installed 100 amp Main Breaker.

All units factory wired.


Available in Ringless and Ring Type Meter styles.

All units standard with hub openings, closure plate included.

All 9" boxes are 9.125" wide.



**CUSTOMER APPROVAL:** 

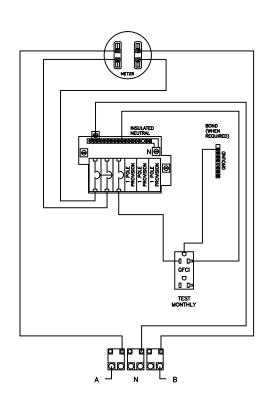

DATE:

## WARNING: MUST BE PERMANENTLY MOUNTED

	IAMESTOWN	THIS DRAWING, WHICH CONTAINS PROPRIETARY INFORMATION, IS THE PROPERTY OF JAMESTOWN ADVANCED PRODUCTS CORPORATION. IT SHALL NOT BE REPRODUCED IN ANY MANNER NOR DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF JAMESTOWN ADVANCED PRODUCTS CORPORATION.	DATE: 7/20/22
J	ADVANCED	PRODUCT PART NUMBER: 42-RT-3-S3	REV. NO.
	PRODUCTS	PRODUCT DESCRIPTION: (SERIES 3) PEDESTAL MOUNT POWER OUTLET WITH A 100 AMP	2855 GIRTS ROAD
	CORPORATION	FACTORY INSTALLED MAIN BREAKER AND 20 AMP GECL	JAMESTOWN, NY 14701

PHONE 800-452-0639 -- FAX 716-483-5398 -- WWW.JAMESTOWNADVANCED.COM